




USCITA SECONDARIA G1/2
SECONDARY OUTLET G1/2

USCITA PRINCIPALE G1/2
MAIN OUTLET G1/2

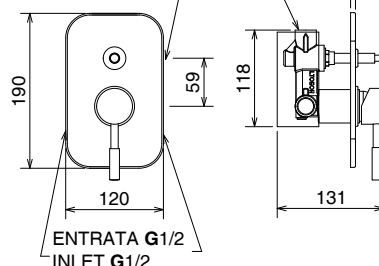

scheda tecnica

technical data

12050R 16

Monocomando incasso doccia con deviatore a ritorno automatico
Built - in shower mixer with automatic return diverter

Cromo, Finitura Acciaio
Chrome, Inox Finishing

- | | |
|---|---|
| <ul style="list-style-type: none"> • Miscelatore con comando a leva • Cartuccia diametro 35 tipo chiuso con dischi in ceramica con limitatore portata e temperatura KN-35B HWS - Kerox • Non disponibile cartuccia versione ECO • Corpo con alette di fissaggio per flessibilità di installazione • Attacchi all' impianto idrico G1/2 • Leva metallica • Piastra ottone scorrevole con rosone di fissaggio • Corpo miscelatore in ottone stampato • Deviatore a pulsante Neoperl con ritorno automatico • Pressione minima funzionamento deviatore 0.7bar • Garanzia 5 anni | <ul style="list-style-type: none"> • Mixer with lever • 35 diameter cartridge with ceramic disc with temperature and flow limiting device KN-35B HWS - Kerox • Not available cartridge ECO version • Concealed part with fastening tabs for easiness installation • Water connections G1/2 • Metallic lever • Swivel brass plate with rosette fixing • Body of mixer in forged brass • Neoperl button diverter with automatic return • Minimun pressure of diverter operation 0.7bar • 5 years guarantee |
|---|---|

- | | |
|--|---|
| <ul style="list-style-type: none"> • Portata 21 litri/min (3 bar) uscita principale • Portata 21 litri/min (3 bar) uscita secondaria | <ul style="list-style-type: none"> • Flow rate 21 liters/min (3bar) main outlet • Flow rate 21 liters/min (3bar) secondary outlet |
|--|---|

- | | |
|--|--|
| <ul style="list-style-type: none"> • Riferimenti normative: • EN 817 • Rivestimento superficiale Ni-Cr a norma EN 248 | <ul style="list-style-type: none"> • Reference standards: • EN 817 • Resistance surface coating Ni-Cr in according EN 248 |
|--|--|

- | | |
|---|--|
| <ul style="list-style-type: none"> • Foratura piano (mm): max55 + 35 | <ul style="list-style-type: none"> • Drilling plan (mm): max55 + 35 |
|---|--|

La Torre srl
28045 Inverio - No
Via Altovergante, 33
ITALY

Tel. +39 0322 255391 r.a.
Fax +39 0322 255442
www.rubinetteria-latorre.it
info@rubinetteria-latorre.it

