TAYA

LA TORRE

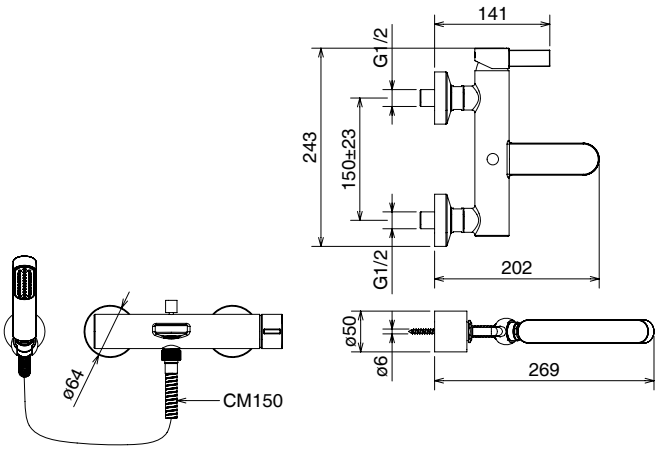

scheda tecnica | technical data

42020

Monocomando esterno vasca con doccia duplex.
Single lever external bath mixer with adjustable shower bracket.

Cromo
Chrome

- Monocomando con comando a leva
- Cartuccia diametro 35 con dischi in ceramica senza possibilità di regolazione della temperatura e portata LT35-GMA - Nuova Galatron
- Aeratore Neoperl M24x1 CACHE SLIM +chiave di smontaggio
- Leva zama
- Deviatore vasca/doccia con blocco manuale
- Rosone ottone G3/4
- Gambo eccentrico G3/4 - G1/2
- Attacchi all' impianto idrico G1/2
- Attacco flessibile doccia G1/2
- Flessibile ottone con gomma atossica
- Doccetta ABS con gomma anticalcare - monogetto
- Supporto a muro regolabile per doccetta
- Garanzia 5 anni

- Mixer with lever
- 35 diameter cartridge closed type with ceramic disc without possibility to regulate the temperature and flow LT35-GMA - Nuova Galatron
- Aerator Neoperl M24x1 CACHE SLIM +disassembly key
- Zamak lever
- Bath/shower diverter with stop
- Brass rosette G3/4
- Eccentric joint G3/4 - G1/2
- Water supply connections G1/2
- Flex hose shower connection G1/2
- Brass flex hose with atossic rubber
- ABS headshower with antilime rubber - single spray
- Adjustable wall bracket for hand shower
- 5 years guarantee

- Portata 20 litri/min (3 bar) uscita vasca
- Portata 12 litri/min (3 bar) uscita doccetta

- Flow rate 20 liters/min (3bar) bath outlet
- Flow rate 12 liters/min (3bar) hand shower outlet

- Riferimenti normative:
- EN 817 - EN32
- EN 248

- Reference standards:
- EN 817 - EN32
- EN 248

- Foratura piano (mm): max40

- Drilling plan (mm): max40

La Torre S.p.A
28045 Invorio - No
Via Altovergante, 33
ITALY

Tel. +39 0322 255391 r.a.
Fax +39 0322 255442
www.latorre-spa.it
info@latorre-spa.it